


Take control with Link-Belt Pulse 2.0 RCL system



- 10" full color touch screen display
- Integrated RCL & ECM data
- Advanced diagnostics and monitoring features
- WiFi enabled for software updates
- Operator customizable
- Link-Belt designed and maintained
- Telematics

V-CALC | Variable outrigger positions

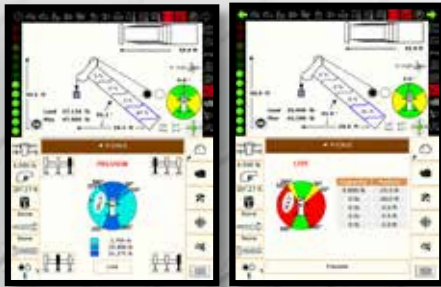

Safe, simple, and easy to understand!

- Real-time 360° Charts
- Integrated RCL
- User friendly interface
- Live preview mode
- Incorporated swing arrest

100|RT

Rough Terrain Crane 100-ton | 90 mt

Remarkable control, reliability and capacity performance

- ✓ 40.6' - 155' (12.3 - 47.2 m) FIVE SECTION FULL-POWER BOOM
- ✓ BOOM LENGTH AND CAPACITY OUTREACHES/OUTLIFTS ALL COMPETITION
- ✓ SIMPLE OPERATION – 2 BOOM EXTEND MODES
- ✓ LINK-BELT PULSE 2.0 – TOTAL CRANE OPERATING SYSTEM WITH V-CALC AND TELEMATICS
- ✓ FULL LED LIGHTING PACKAGE WITH 3 ON-BOARD CAMERAS
- ✓ TRANSPORTS AT UNDER 94,000 LBS | 46 640 KG WITHOUT COUNTERWEIGHT
- ✓ LATEST, SIMPLE, ONE-MAN FLY ERECTION TECHNOLOGY MINIMIZES WORK-AT-HEIGHT!



Link-Belt®

C R A N E S

Lexington, Kentucky | www.linkbelt.com

100|RT

100-ton | 90 mt
Rough Terrain Crane

**Service and maintenance
just got easier!**

- ✓ 24 VOLT ELECTRICAL SYSTEM
- ✓ CENTRALIZED GREASE BANK AND PRESSURE CHECKS
- ✓ MULTIPLEXING CAN-BUS NETWORK
- ✓ GREASELESS FOUR-LINK SUSPENSION
- ✓ SERVICEABLE PONTOONS
- ✓ REMOTE MOUNTED TRANSMISSION OIL, ENGINE OIL, AND FUEL FILTERS



Centralized pressure check and grease bank

Allows operator to check six pressures and grease three different points from one centralized location on the upper frame. Boom foot pins, head machinery sheaves, and cab tilt cylinder are also greaseless

Transport weight of less than 94,000 lbs includes:

- ✓ MAIN & AUX WINCHES WITH WIRE ROPE & CABLE FOLLOWERS
- ✓ 35'-58' 2-PIECE FLY STOWED
- ✓ 60 TON HOOK BLOCK
- ✓ 10 TON HOOK BALL
- ✓ AUX LIFTING SHEAVE
- ✓ FULL TANK OF FUEL



Operator's cab features

- 0-20° tilting cab
- Extra large windows throughout provide 20% more visibility
- Internal rated capacity limiter light bar
- Integrated air conditioning with automatic temperature control
- New single and dual axis electronic controllers

Latest, simple, one-man fly erection technology minimizes work-at-height!

- One man operation
- Swing around at 0°
- Minimal ladder climbs
- Control fly assist and boom hoist cylinder from the ground
- Pivot-point & boom head speed screws

Vision package | See what you've been missing




Camera display



Boom head speed screws



Ground level controls for fly erection

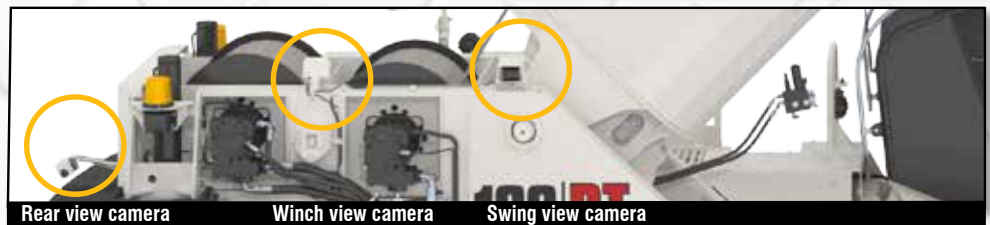

Rear view camera

Winch view camera

Swing view camera



Link-Belt CRANES

Link-Belt Construction Equipment Company - Lexington, Kentucky
www.linkbelt.com

© Link-Belt is a registered trademark. Copyright 2018. All rights reserved.
We reserve the right to change designs and specifications at any time.
Litho in U.S.A. 3052 10/18 #4540